


K32LX

32-Character Hardwired LCD Keypad with built-in transceiver

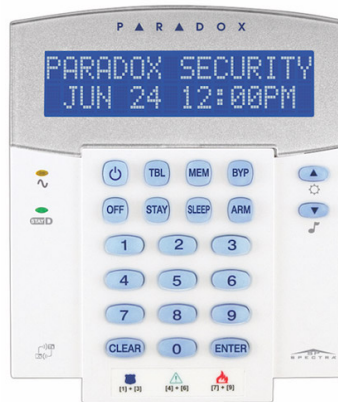

Features

- Built-in transceiver (433 or 868 MHz)
- 32-character, blue LCD with programmable labels
- StayD with status LED
- Real-time zone alarm display
- In-field firmware upgradable via 307USB and WinLoad
- 1 keypad zone input
- 1 PGM output (follows arm status)
- 8 one-touch action buttons
- 3 keypad-activated panic alarms
- Adjustable backlight, contrast, and scroll speed
- Independently set chime zones
- Connects to 4-wire expansion bus
- 1 K32LX per SP system
- Supports K32RF and K37 keypads
- Compatible with SP5500/SP6000/SP7000 version 4.72 and higher
- Compatible with SP4000/SP65 version 4.90 and higher (1 way communication only)

Certified for EN 50131 Grade 2